



1774
#9
6-28-03
PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Madeleine PRIGENT, *et al.*

Appln. No.: 09/559,595

Group Art Unit: 1774

Confirmation No.: 3132

Examiner: Jill M. GRAY

Filed: April 28, 2000

Attorney Docket No.: Q58982

For: AN OPTICAL FIBER CABLE HAVING IMPROVED PROPERTIES

RECEIVED
JUN 25 2003
GROUP 1700

**SUBMISSION OF SWORN TRANSLATION
OF THE FRENCH PRIORITY DOCUMENT**

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Further to the Amendment filed May 20, 2003, and in connection with the remarks in the paragraph bridging pages 4 and 5 of the Amendment, Applicants submit herewith a sworn translation of the French priority document (FR 9905764), properly executed. The Examiner is respectfully requested to acknowledge receipt of said translation.

Respectfully submitted,

L. Raul Tamayo
Registration No. 47,125

SUGHRUE MION, PLLC
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

WASHINGTON OFFICE



23373

PATENT TRADEMARK OFFICE

Date: June 23, 2003



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Madeleine PRIGENT and Sophie VANPOULLE

Serial No: 09/559 595

Filed: April 28, 2000

For: AN OPTICAL FIBER CABLE HAVING IMPROVED PROPERTIES

DECLARATION

RECEIVED
JUN 25 2003
GROUP 1700

I, Andrew Scott Marland, of 35, avenue Chevreul, 92270 BOIS COLOMBES, France, declare that I am well acquainted with the English and French languages and that the attached translation of the specification and claims as originally filed on May 6, 1999 in respect of French patent application number 99/05764 is a true and faithful translation of that document.

All statements made herein are to my own knowledge true, and all statements made on information and belief are believed to be true; and further, these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any document or any registration resulting therefrom.

Date: May 30, 2003

Andrew Scott Marland

AN OPTICAL FIBER CABLE HAVING IMPROVED PROPERTIES

The present invention relates to an optical fiber cable whose properties, in particular its mechanical, electrical, water repellent, and fire resistant
5 properties, are significantly improved compared with presently known cables. Such cables are used for data transmission.

The invention relates more particularly to the material included in one of the covering layers placed
10 around a fiber or a set of fibers.

In general, such cables comprise one or more optical fibers. Each fiber is constituted by an optical core surrounded by optical cladding. The fiber is surrounded by at least one layer of a protective covering. The
15 fibers can be brought together in a ribbon or a bundle and the set of fibers is then in turn surrounded by one or more layers of a protective covering.

The role of the covering is to protect the optical fiber(s) from external mechanical damage, moisture
20 penetration, and if necessary to provide electrical insulation. In addition, in the event of a fire, it must provide sufficient resistance to fire. At present, most such coverings comprise a continuous matrix, generally made of a polymer, optionally containing filler particles
25 that may be inorganic.

An object of the present invention is to propose an optical fiber cable whose characteristics, and in particular whose mechanical, water-proofing and fire-proofing characteristics are significantly improved
30 compared with presently known cables.

The present invention provides a cable comprising at least one optical fiber and at least one covering layer, the cable being characterized in that said layer is essentially constituted by a material comprising an
35 inorganic compound of layered structure and an organic compound inserted between the layers of said inorganic compound.

At present, inorganic fillers are commonly used in one or other of the covering layers of cables, but those fillers have a particle size of micron order, they are dispersed in a polymer, and they conserve their initial size after being blended with the polymer.

In the present invention, use is made of an inorganic compound of layered structure which, after special treatment, enables an organic compound to be intercalated between its layers. The initial particle size of the inorganic compound is of micron order. When an organic compound becomes inserted between the layers, the inorganic compound exfoliates, thereby forming a composite material. After intercalation of the organic compound and exfoliation of the inorganic compound, the inorganic compound is distributed in uniform manner throughout the composite material and presents particles of a size that is of nanometer order. A significant improvement of the properties of the material is then observed, and special properties are seen to appear.

The term "essentially constituted by" is used to mean that the layer can also have smaller quantities of various additives intended in particular for facilitating the shaping thereof (plasticizers, lubricants, etc.), for slowing down aging (stabilizers, UV absorbers, flame retarders, anti-oxygen agents, anti-shock agents, etc. ...) or for modifying the appearance thereof (colored pigments, etc. ...).

The inorganic compound can be selected from a graphite and an inorganic oxide. Graphite is selected if it is desired to obtain a conductive layer, and an inorganic oxide is selected if it is desired to obtain a layer which is electrically insulating. In the present case, it is preferable to select an oxide. By way of example, suitable inorganic oxides include a silicate such as asbestos, feldspar, a magnesium silicate such as talc, an aluminum silicate such as mica or a clay,

aluminas, titanates, or zirconias providing they present a layered structure.

5 The inorganic oxide is preferably a silicate, and more preferably an alumino-silicate such as a natural or artificial clay, and optionally has bridging links. The clay preferably presents a crystal structure made up of a stack of layers and possessing surface OH^- ions. Suitable clays include kaolin, smectite, montmorillonite, bentonite, beidellite, nontronite, saponite, hectorite, 10 vermiculite, wollastonite, or any mixture of a plurality of clays.

In a preferred embodiment of the present invention, the selected clay is montmorillonite, also known as Fuller's earth when it contains calcium, and also known 15 as bentonite when it contains sodium.

The organic compound intercalated between the layers of the inorganic compound is preferably a polymer, an oligomer, or a monomer that is polymerized in situ.

20 When the covering material of the invention is used as a protective coating on a fiber, it is preferable to use a polymer selected from polyesters, polyethers, such as polyvinyl ethers, polyurethanes, such as polyurethane acrylates, maleates, fumarates, polythiols, in particular dithiols, polyenes, copolymers or mixtures of the above- 25 mentioned polymers such as maleate-fumarate or polythiol-polyene systems. Polymers such as epoxy resins, polyimides, polyamides, or silicones can also be treated in similar manner.

30 In a method of manufacturing a cable by extrusion, an extrudable polymer should be used that can be selected from polyolefins such as polyethylenes (PE) and polypropylenes (PP), polybutyleneterephthalates (PBTP), vinyl polymers such as polyvinyl chlorides (PVC), elastomers which can optionally be halogenated, or indeed 35 thermoplastics, silicones, copolymers thereof such as copolymers of ethylene, and mixtures of the above. Suitable ethylene copolymers include copolymers of

ethylene and of vinyl acetate (EVA), copolymers of
ethylene and of propylene (EPR), copolymers of ethylene
and alkyl acrylate such as ethylene and ethyl acrylate
(EEA) copolymer or methyl acrylate (EMA) copolymer,
5 copolymers of ethylene and acrylic acid, terpolymers of
ethylene, or the same polymers including specific
functional groups (acids, epoxy, etc. ...).

In a method of manufacturing a cable implementing
polymers of the liquid state, a polymer should be used
10 selected from epoxy resins, polyesters, polyimides, such
as polyetherimides or polyamidimides, polyamides (PA),
polyurethanes, silicones, and copolymers or mixtures of
the above-cited polymers.

The invention is particularly applicable to an
15 optical fiber surrounded by at least one coating layer
which is essentially constituted by the covering
material. A plurality of fibers provided with such
coatings can be associated with one another in order to
make up a cable.

20 Optical fiber cables presently in use for long
distance transmission are of two types. A first type has
a "cellular" or free structure, i.e. it has one or more
elements in the form of a tube or of a grooved rod in
which the optical fibers are received. A second type of
25 optical fiber cable has a "ribbon" structure, i.e. the
optical fibers are placed parallel to one another.

A first application of the present invention relates
to buried telecommunications cables. Such cables have a
plurality of optical fibers. The outer sheath of the
30 cable comprises at least one layer that is essentially
constituted by the covering material of the invention.

Another application relates to underwater
telecommunications cables. Such cables have a bundle of
optical fibers and at least one insulating sheath
35 surrounding the bundle and comprising at least one layer
that is essentially constituted by the covering material
of the invention.

The invention also provides a method of manufacturing a cable having at least one optical fiber and at least one covering layer essentially constituted by a covering material made by the following steps:

5 · said inorganic compound is treated with an agent so as to ensure that it is compatible with said organic compound;

 · said treated inorganic compound is mixed with said organic compound at a temperature higher than the
10 softening temperature or melting temperature of said organic compound; and

 · said material is obtained, said organic compound being inserted between the layers of said inorganic compound.

15 The inorganic compound is treated with a wetting agent compatible with the organic compound so as to favor intercalation of the organic compound between the layers of the inorganic compound.

 In an implementation of the present invention, the
20 inorganic compound is a clay and the compatibility agent is selected from quaternary ammonium salts, polyethylene oxides, and phosphorus-containing derivatives.

 Other characteristics and advantages of the present invention will appear on reading the following examples
25 which are naturally given by way of non-limiting illustration, and from the accompanying drawing, in which:

 · Figure 1 is a diagrammatic section view of an optical conductor comprising an optical fiber surrounded
30 by a protective covering;

 · Figure 2 is a diagrammatic section view of a bundle of optical fibers brought together in a tube;

 · Figure 3 is a diagrammatic section view of a land telecommunications cable; and

35 · Figure 4 is a diagrammatic section view of an underwater telecommunications cable.

Figure 1 shows an optical conductor 10 comprising an optical fiber 1 constituted by an optical core 2 and surrounded by optical cladding 3. The fiber 1 is surrounded by at least one layer of a protective coating 4. The protective coating 4 is essentially constituted by the covering material of the invention.

In order to provide better mechanical strength and better protection against shock, the optical conductors 10 can be assembled together in a bundle which is placed inside a polymer tube 21, e.g. made of PP or of PBTP, as shown in Figure 2. The conductors 10 are separated from one another by a filling compound 22 which is generally a grease.

Figure 3 shows an optical fiber cable 30 for a land application, i.e. a cable that is designed to be buried. A plurality of tubes 21 analogous to the tube shown in Figure 2 are disposed around the periphery of a rod 31 that is often reinforced with glass fibers and that is in contact with a filling compound 32. The assembly is surrounded by metal armoring 33 covered by a sheath 34 which needs to have good mechanical properties, good fire resistance, and low permeability to water. The sheath 34 is essentially constituted by the covering material of the invention and made as described below.

10 grams (g) of bentonite are blended with 3 g of 2-oleybis-hydroxyethyl methyl ammonium chloride sold by AKZO under the name "ETHOQUAD", and the mixture is raised to 60°C. The mixture is then subjected to ultrasound for 2 minutes (min). The ammonium salt intercalates between the layers of the clay.

The filler treated with the organic compound is then added, i.e. very low density polyethylene (VLDPE) at a concentration of 5% by weight. The mixture is then blended for 5 min at 160°C, after which it is extruded or molded around the cable.

X-ray diffraction can be used to measure variation in the distance between the layers in the inorganic

compound. This distance should be found to have increased by 40% which guarantees that the polymer has been intercalated properly between the silicate layers. This type of intercalation is commonly referred to as a "nanocomposite".

The advantages provided by using the material of the present invention are summarized in the table below. In particular, there can be seen a significant improvement in withstanding fire and a decrease in the water transmission coefficient.

	Prior art	Invention
Strength: breaking stress elongation	28.5 MPa 570%	34 MPa 604%
Water transmission coefficient (ASTM E 96 standard)	43×10^{-6} g/m ² /24 h	33×10^{-6} g/m ² /24 h
Response to fire (ASTM D 2863 standard)	the material burns and runs	the material does not run, it carbonizes

For an underwater cable 40 as shown in Figure 4, the optical conductors 10 are assembled as a bundle which is placed inside a metal tube 41. The conductors 10 are separated from one another by a filling compound 42 such as a gel. The metal tube 41 is surrounded by steel armoring 43, itself surrounded by a conductive layer 44, e.g. made of copper. The outer sheath 45 must have good mechanical properties and in particular must withstand abrasion well and must absorb very little water since it is required to isolate the underwater cable for at least 25 years. This sheath is essentially constituted by the covering material of the invention and made in the manner described above.

To make the protective coating of an optical fiber with the covering material of the invention, the

procedure is similar, with the inorganic compound being mixed with the organic compound that is normally used for this purpose, for example a thermoplastic polymer such as a polyester or a polyurethane, or a photopolymerizable resin such as urethane, acrylate, maleate-fumarate, or polythiol-polyene resins. The material is implemented in a manner analogous to that for the materials usually used for coating fibers: the fiber is coated with the material and polymerized under UV if the polymer is photocurable.

- 5
10 When using the material of the invention as the protective coating of an optical fiber, the water-proofing properties of the coating are significantly improved.

CLAIMS

- 1/ A cable comprising at least one optical fiber and at least one covering layer, the cable being characterized in that said layer is essentially constituted by a material comprising an inorganic compound of layered structure and an organic compound inserted between the layers of said inorganic compound.
- 2/ A cable according to claim 1, in which said inorganic compound is an inorganic oxide.
- 3/ A cable according to claim 2, in which said inorganic oxide is a clay selected from kaolin, smectite, montmorillonite, bentonite, beidellite, nontronite, saponite, hectorite, vermiculite, wollastonite, and mixtures thereof.
- 4/ A cable according to claim 3, in which said clay is selected from montmorillonite and bentonite.
- 5/ A cable according to any preceding claim, in which said organic compound is selected from polymers, monomers, and oligomers.
- 6/ A cable according to claim 5, in which said compound is a polymer selected from: polyesters, polyethers, polyvinyl ethers, polyurethanes, polyurethane acrylates, maleates, fumarates, polythiols, polyenes, and copolymers and mixtures thereof.
- 7/ A cable according to claim 5, in which said polymer is selected from: polyolefins, polybutyleneterephthalates, vinyl polymers, elastomers, silicones, and copolymers and mixtures thereof.
- 8/ A cable according to claim 5, in which said polymer is selected from: epoxy resins, polyesters, polyamides,

polyimides, polyetherimides, polyamidimides,
polyurethanes, silicones, and mixtures thereof.

9/ A cable according to any preceding claim, comprising
5 an optical fiber surrounded by a protective coating
including at least one layer constituted essentially by
said covering material.

10/ A cable according to any preceding claim, including a
10 plurality of optical fibers and an outer sheath including
at least one layer constituted essentially by said
covering material.

11/ A cable according to any preceding claim, comprising
15 a bundle of optical fibers and an insulating covering
having at least one layer constituted essentially by said
covering material.

12/ A method of manufacturing a cable according to any
20 preceding claim, wherein said covering material is made
by the following steps:

- said inorganic compound is treated with an agent
so as to ensure that it is compatible with said organic
compound;
- 25 • said treated inorganic compound is mixed with said
organic compound at a temperature higher than the
softening temperature or melting temperature of said
organic compound; and
- said material is obtained, said organic compound
30 being inserted between the layers of said inorganic
compound.

13/ A method according to claim 12, in which said
inorganic compound is a clay and said compatibility agent
35 is selected from quaternary ammonium salts, polyethylene
oxides, and phosphorus-containing derivatives.



1/1

FIG. 1

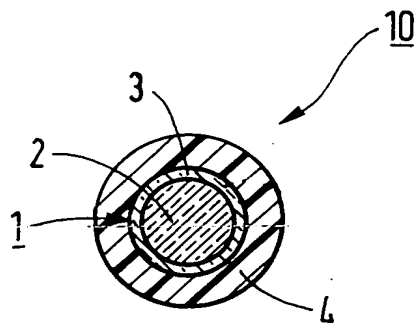


FIG. 2

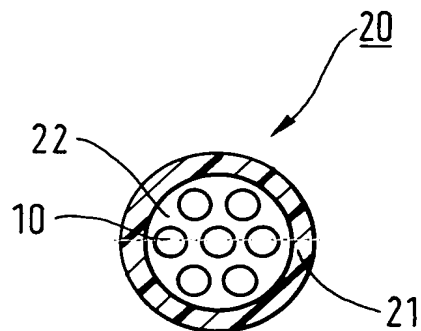


FIG. 3

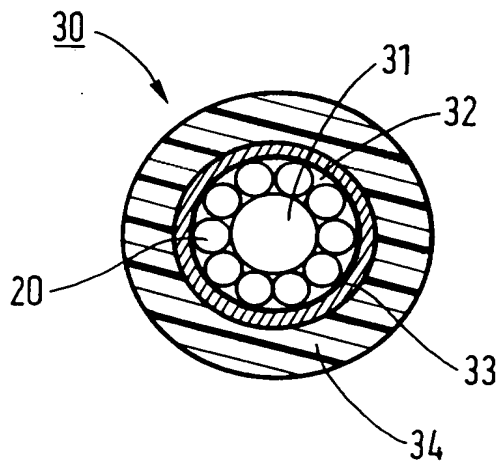


FIG. 4

